



FUKE FK11-7T

Basic Information



Wheel base

2250mm

Total weight

7000kg

Rated output/r.p.m

83/2000kw/rpm



Customization and assistive devices






Technical Specification

Power type	Diesel
Rated capacity	7000kg
Load center	600mm
Quantity of wheels	4x/2
Type of tyres	Pneumatic TIRE
Tires(Front)	8.25-15-14PR
Tires(Rear)	8.25-15-14PR
Driving Brake	Hydraulic pedal
Parking Brake	Mechanical manual
Engine Model	Yuchai
Rated output	83/2000kw/rpm
Rated torque	450/1450N.m/rpm
No. of cylinder	6-110x125
Displacement	7.13L
Fuel tank capacity	140L
Number of speeds for transmission	2-2 Power shift transmission
Height of mast (standard)	2500mm
Free lift height(standard)	205mm
Height of Load-backrest	1372mm
Distance from seat to overhead guard	1045mm
Overhead guard height	2450mm
Length without fork	3440mm
Front overhang	590mm
Rear overhang	740mm
Wheel base	2250mm
The height of traction pin	395mm
Min. ground clearance	200mm
Overall width	1995mm
The distance between forks	1840/300mm
Tread(front /rear)	1470/1700mm
Min. Turning radius(outside)	3370mm
Min. Turning radius(inside)	210mm
Min. Intersecting aisle	3040mm
Mast tilt angle	6°/12°deg
Fork size	1220X150X70mm
Max. lift height of mast with Load-back-rest	4380mm


Outline

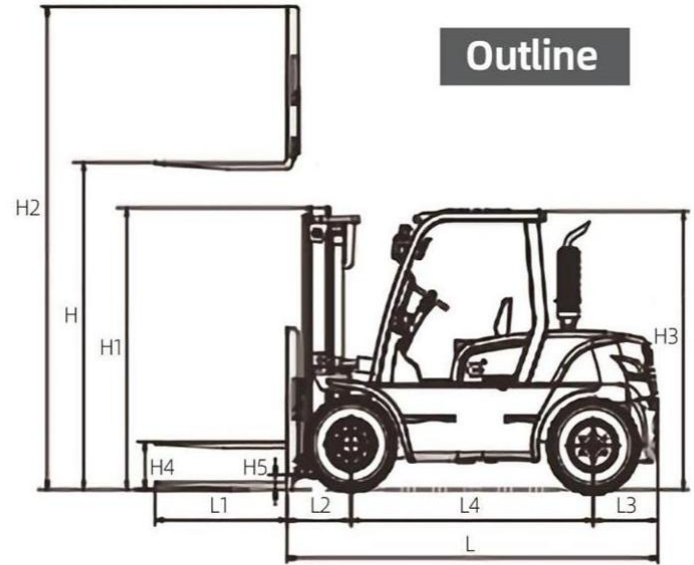


RASA Right-Angle Stack Aisle

a: Safety Clearance

b: Load Length

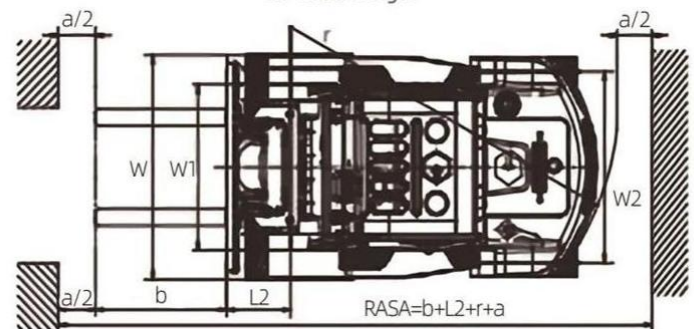

Load curve

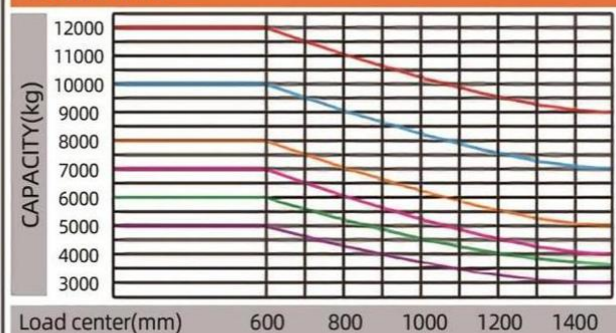

Note:

Capacities shown are computed with upright in vertical position. Based on a 1000 mm cube load configuration with the center of gravity at the true center of the cube and standard forks. Truck capacities with upright in forward tilt position will be less. Long forks and unusually wide or loads may also reduce capacity.

*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.