

FK-C18T

Weight:

27000kg

Wheelbase:

3800mm

Load Center:

900mm

tractionn:


130kn

Overall width:

2750mm

Rated Load:

18000kg

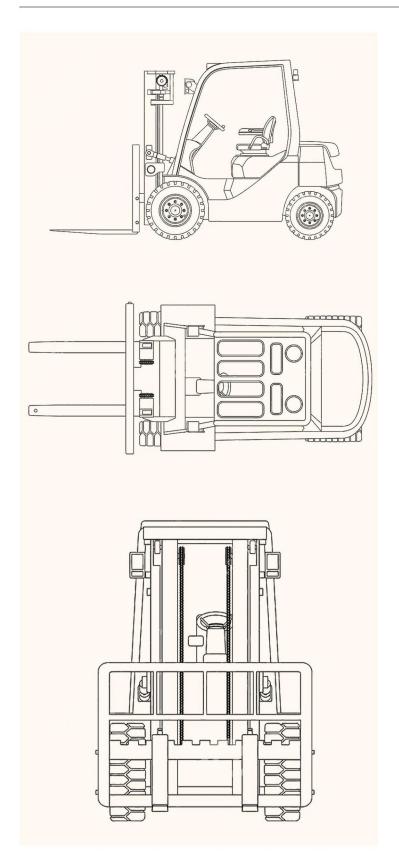

Toohnicol	omonifications
Ittillitai	specifications

Features	
Rated Load:	18000kg
Wheel base:	3800mm
Load center:	900mm
Chassis	
Tire Specs Front:	12.00-24
Tire Specs Rear:	12.00-20
Tires Qty,front/rear(X-dreve wheels):	4/2
Wheel tread Front:	2070mm
Wheel tread Rear:	2130mm
Weight:	27000kg

Dimensions

Mast/carriage tilt angle(front/rear)): 6/12		
Mast height(fork lowering):	4750mm		
Mast lifting height:	6000mm		
Max.height:	7720mm		
height to head guard(height to cab):3210mm			
Overall height (with forks):	7480mm		
Overall width:	2750mm		

Performance

Max.lifting speed(with load/without load):

240/300mm/s

1800*200*100mm

tractionn: 130kn

Dimensions

Fork dimension:

Fork carriage width: 2700mm

Mast min ground(with load): 300mm

Wheelbase center min ground(with load):350mm

Min.turning Radius: 5340mm

Travel speed(with load/without load): 22/30km/h

Transmission gears(Front/rear): 2/1
Engine: Yuchai
brand/model: YJ6J175-T302

安徽福客重工有限公司 Anhui Fuke Heavy Industry Co., Ltd. website:www.sfuke.com whatsapp:+8613505697380 Address: Room 405, Building B-4, East Side of Dazhong Road, Cuozhen Town, Feidong County,Hefei City,Anhui Province