

FK FUKU 福客®

FK-588

进 取 不 止

FUKE

**Boutique Manufacturing
Conquer The World With Quality**



www.sfuke.com fuke7380@gmail.com

Basic Configuration

Bucket capacity

1.0m³

Operation weight

8200kg

Rated load

1800kg

Wheel base

2200mm

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Anhui FUKU Heavy Industries Ltd.

web:www.sfuke.com

Basic Parameters ●

Overall Operating Weight: 8200KG

Transport Dimension L*W*H(mm):

6200×2250×3763

Wheel base: 2200mm

Min. Ground Clearance: 300mm

Bucket Capacity: 1.0m³

Breakout Force: 38KN

Loading Lifting Capacity: 2500KG

Bucket Dumping Height: 2742mm

Bucket Dumping Distance: 1062mm

Digging Depth: 52mm

Backhoe Capacity: 0.3 m³

Final Reducer: Single Stage Final Reducer

Rated Loader of Axle: 4/18.5t

Strong bearing

Driving comfort

Easy maintenance

Reliable structure

Excellent efficiency

Booster

Car air conditioner



Protective Device

GPS positioning

On-board repair tools

CD Player

Loader Outline ●

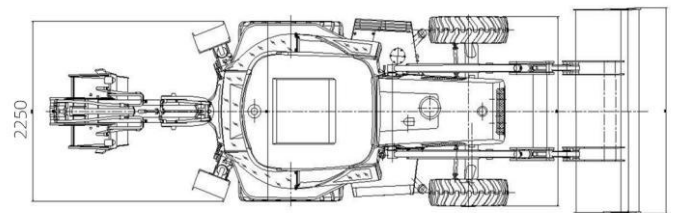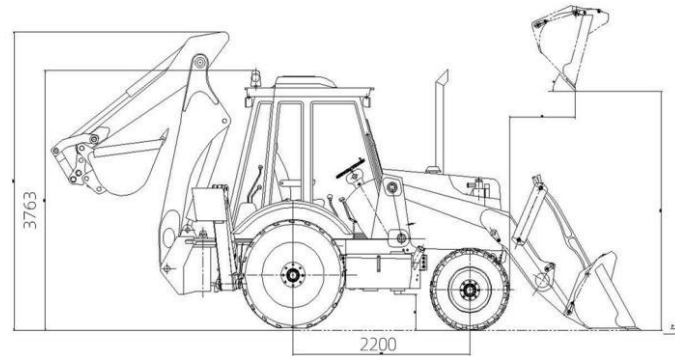

Accessories ●



*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice

web: www.sfuke.com

whatsapp: +8613505697380

Address: Room 405, Building B-4, East Side of Dazhong Road, Cuozhen

Town, Feidong County, Hefei City, Anhui Province

web:

www.sfuke.com

FK-588 accessories ●



Four-in-one bucket



Mining quick change



Drag fork



Breaker



Reserve breaker pipeline



Digging arm pitch-fork/wood grabbing fork



Telescopic arm , eight-shaped outriggers are recommended.

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.