

FK FULKE 福客®

FK22-9

**Boutique Manufacturing
Conquer the word with Quality**




FK22-9

Total Weight: 2180 kg

Standard bucket capacity: 0.09 m³

Rated power: 20.5/2200 kW/rpm

- New generation product
- Exquisite
- Reliable structure
- Excellent performance
- Small and efficient
- Convenient maintenance
- Cost-effective

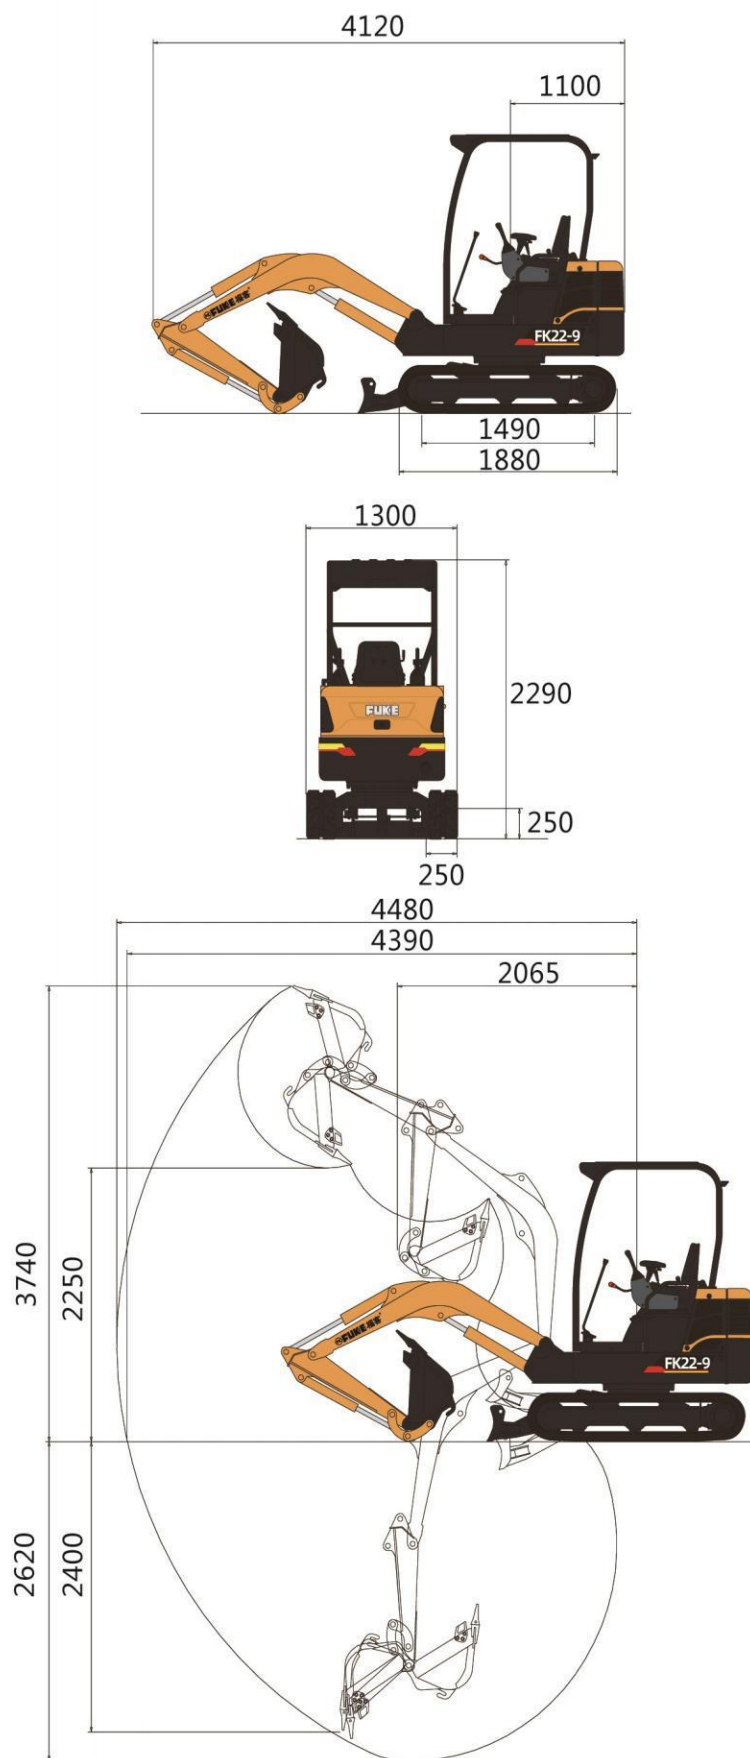

► Technical specifications

Basic parameters

| | |
|--------------------------|---------------------|
| Total Weight | 2180 kg |
| Standard bucket capacity | 0.09 m ³ |
| Standard bucket width | 555 mm |

Performance parameter

| | |
|---------------------------------|------------------|
| Engine | Laidong |
| Engine rated power | 20.5/2200 kW/rpm |
| Gradeability | 30 ° |
| Maximum digging force of stick | 9.6 kN |
| Maximum digging force of bucket | 14.9 kN |
| Driving speed | 2.25 km/h |
| Main traction force | 19.6 kN |
| Platform rotation speed | 10-12.5 rpm |

Job parameters

| | |
|----------------------------------|---------|
| Maximum digging height | 3740 mm |
| Maximum digging depth | 2620 mm |
| Maximum digging radius | 4480 mm |
| Maximum ground excavation radius | 4390 mm |
| Maximum unloading height | 2250 mm |
| Minimum radius of gyration | 2065 mm |
| Maximum vertical digging depth | 2400 mm |

Transport size

| | |
|----------------------------------|---------|
| Overall length (transport state) | 4120 mm |
| Overall width (transport state) | 1300 mm |
| Overall height (transport state) | 2290 mm |

Other parameters

| | |
|-------------------------------|---------|
| Track width | 1300 mm |
| Track length | 1880 mm |
| Track shoe width | 250 mm |
| Minimum ground clearance | 250 mm |
| Balance weight off the ground | 1100 mm |
| Radius of tail gyration | 1490 mm |
| Fuel tank capacity | 29 L |
| Hydraulic oil tank capacity | 38 L |

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com