

FK FUKU 福客®

FUKE

**Boutique Manufacturing
Conquer The World With Quality**



FK215-9

进 取 不 止


FK215-9

Total Weight: 22300 kg

Standard bucket capacity: 0.9-1.1 m³

Rated power: 140/2200 kW/rpm

- Perfect match with Yuchai engine
- Full power reserve and low fuel consumption
- Low operating and maintenance costs
- Nanny-style service extended warranty

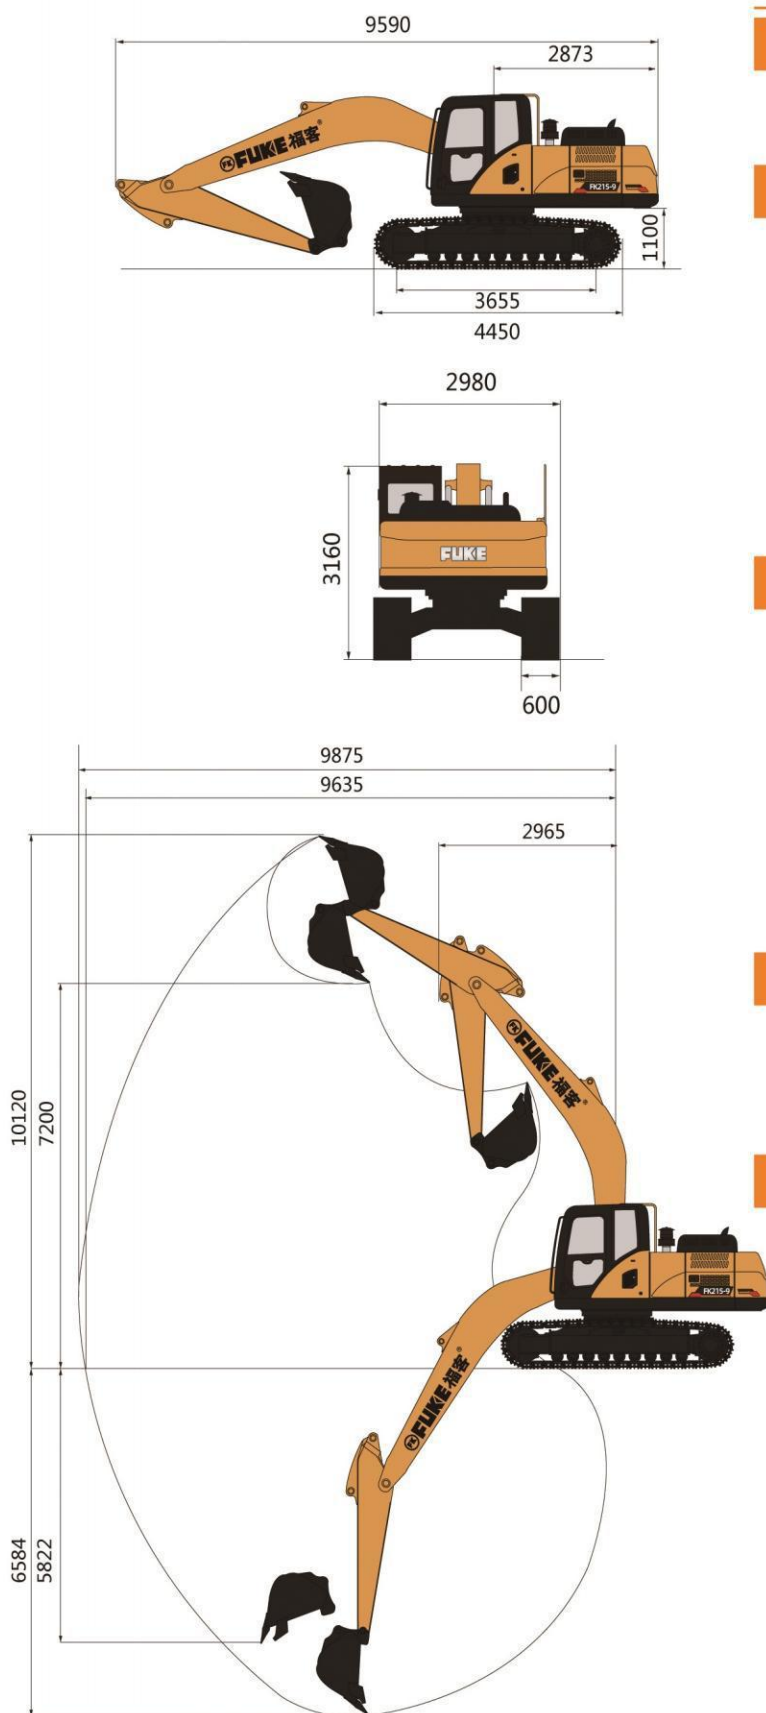

► Technical specifications

Basic parameters

Total Weight	22300 kg
Standard bucket capacity	0.9-1.1 m ³

Performance parameter

Engine	Yuchai
Engine rated power	140/2200 kW/rpm
Gradeability	35 °
Maximum digging force of stick	109 kN
Bucket excavation	150 kN
Driving speed	3.2/5.0 km/h
Platform rotation speed	11-13 rpm

Job parameters

Maximum digging height	10120 mm
Maximum digging depth	6584 mm
Maximum digging radius	9875 mm
Maximum ground excavation radius	9635 mm
Maximum unloading height	7200 mm
Minimum radius of gyration	2965 mm
Maximum vertical digging depth	5822 mm

Transport size

Overall length (transport state)	9590 mm
Overall width (transport state)	2980 mm
Overall height (transport state)	3160 mm

Other parameters

Track width	2980 mm
Track length	4550 mm
Track shoe width	600 mm
Minimum ground clearance	470 mm
Balance weight off the ground	1100 mm
Radius of tail gyration	2873 mm
Track wheelbase	3655 mm
Fuel tank capacity	325 L
Hydraulic oil tank capacity	200 L

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.