



FK550-9

Total Weight: 51000 kg

Standard bucket capacity: 2.4-3 m³

Rated power: 298/2000 kW/rpm




- New generation product
- Exquisite
- Reliable structure
- Excellent performance
- Small and efficient
- Convenient maintenance
- Cost-effective

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com

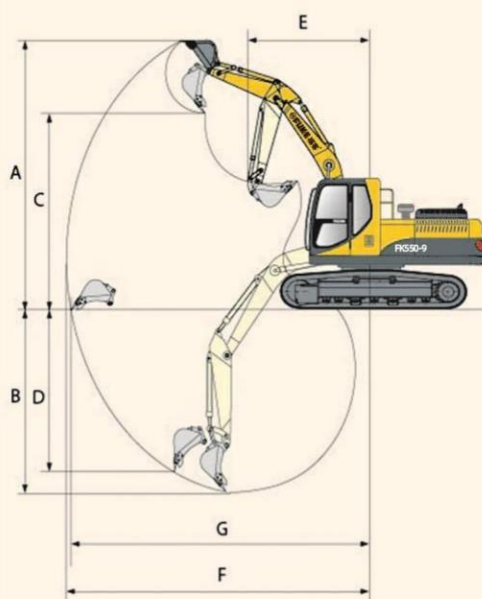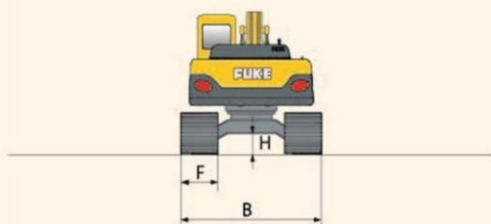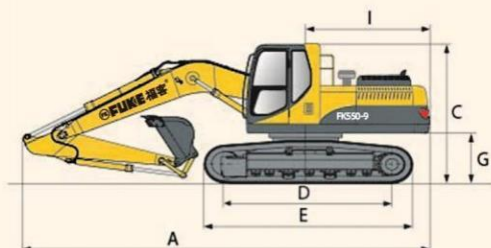

► Technical specifications

Basic parameters

Total Weight	51000 kg
Standard bucket capacity	2.4-3 m ³

Performance parameter

Engine	Cummins
Engine rated power	298/2000 kW/rpm
Working weight of the whole machine	50000 kg
Volume of fuel tank	620 L
Hydraulic oil tank	390 L
Hydraulic pump	Original (Korea Import)
Control valve	Original (Korea Import)

Job parameters

Maximum digging height	10940 mm	A
Maximum digging depth	7340 mm	B
Maximum unloading height	7760 mm	C
Maximum vertical digging distance	11700 mm	D
Total track length	5465 mm	
Track plate width	600 mm	
Ground clearance of counterweight	1460 mm	

Transport size

Overall length (transport state)	12100 mm	A
Overall width (transport state)	3340 mm	B
Overall height (transport state)	3705 mm	C

Other parameters

Rotation motor	Original (Korea Import)
Traveling motor	Original (Korea Import)
Heat dissipation system	Split cooling system

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com

*We follow the principle of continuous improvement. Product performance parameters will be partially changed due to technical improvements without prior notice.