

FK150-9L

Total Weight: 13600 kg

Standard bucket capacity: 0.58 m³

Rated power: 85.4/2200 kW/rpm

■New generation product

■Exquisite


■ Reliable structure


■Excellent performance


■Small and efficient

■Convenient maintenance

■ Cost-effective

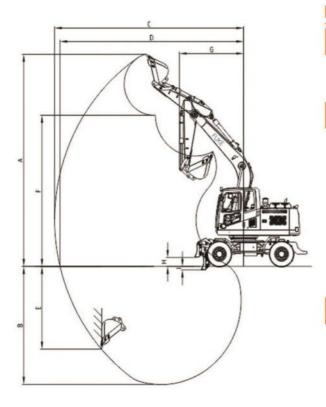

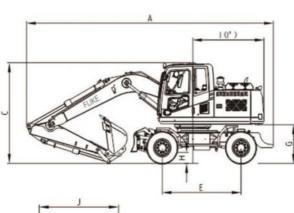



► Technical specifications

Basic parameters Total Weight

Performance parameter

Standard bucket capacity

Engine	Cummins
Engine rated power	85.4/2200 kW/rpi
Gradeability	70 %(35 °)
Maximum digging force of stick	74.2 kN
Bucket excavation	82.7 kN
Driving speed	30 km/h
Platform rotation speed	13 r/min

13600 kg

0.58 m³

Job parameters

Maximum digging height	8498 mm	Α
Maximum digging depth	4685 mm	В
Maximum digging radius	7900 mm	C
Maximum digging radius on the ground	7668 mm	D
Maximum vertical digging depth	4300 mm	E
Maximum unloading height	6055 mm	F
Boom length	4600 mm	

Transport size

Overall length (transport state)	7785 mm
Overall width (transport state)	2500 mm
Overall height (transport state)	3158 mm

Other parameters

Wheelbase	2600 mm	Ε
Axle track	1944mm	F
Counterweight ground clearance	1260 mm	G
Minimum ground clearance	378 mm	Н
Tail length	2290mm	1
Fuel tank capacity	270 L	
Hydraulic oil tank capacity	125 L	
Working pressure of slewing system	270 har	

安徽福客重工有限公司 Anhui Fuke Heavy Industry Co., Ltd. website:www.sfuke.com whatsapp:+8613505697380 Address: Room 405, Building B-4, East Side of Dazhong Road, Cuozhen Town, Feidong County,Hefei City,Anhui Province









Jaw Crusher



Multifunctional Crushing Screen



Hydraulic Wood Clamp



Rotating Screening Bucket



Multifunctional Hydraulic Shears



Milling Machine

ANHUI FUKE HEAVY INDUSTRY EQUIPMENT CO., LTD.

安徽福客重工设备有限公司

Email:fk002@fukebn.com Whatsapp:+8613505697380