



Basic Information

Bucket capacity

0.5m³

Rated power

55kw

Operating load

1050kg

Wheelbase




1115mm

Basic Parameters

Technical Specification

Operating load (kg)	1050
Max Speed (km/h)	12
Rated flux (L/min)	80
High Flow Flux (L/min)	120(optional)
Tire (track) model	12-16.5
Rated power (Kw)	55
Fuel tank capacity (L)	75
self weight bucket (kg)	3500
Bucket capacity (m3)	0.5
Overall operating height (mm)	4070
Height to bucket hinge pin (mm)	3150
height to top of cab (mm)	2160
Height to bottom of level bucket(mm)	2983
Overall length ithout bucket (mm)	2880
overall length with bucket(mm)	3580
Dumping angle at maximum height(°)	40
Dumping height(mm)	2450
Dumping reach(mm)	700
Rollback o bucket on ground(°)	30
Rollback of bucket at full height(°)	104
Wheelbase(mm)	1115
Ground clearance(mm)	205
Angleof departure(°)	20
Front turning radins without bucket(mm)	1250
Front tuning radius(mm)	2112
Rear tuning radius(mm)	1774
Rear axle to bumper (mm)	1082

Outline

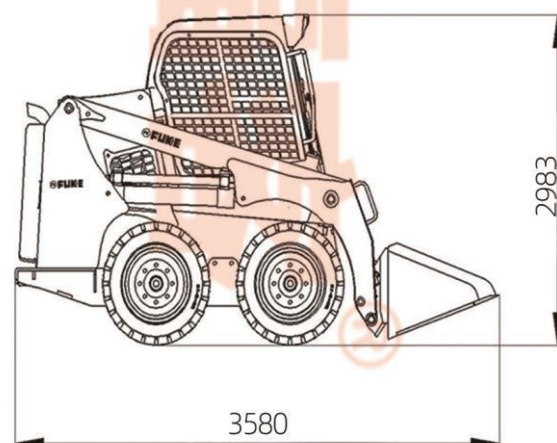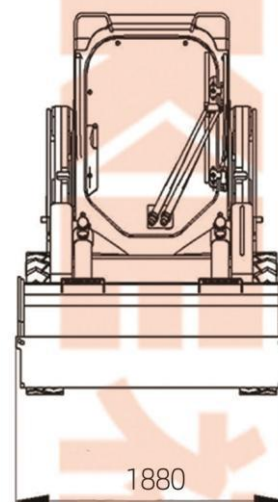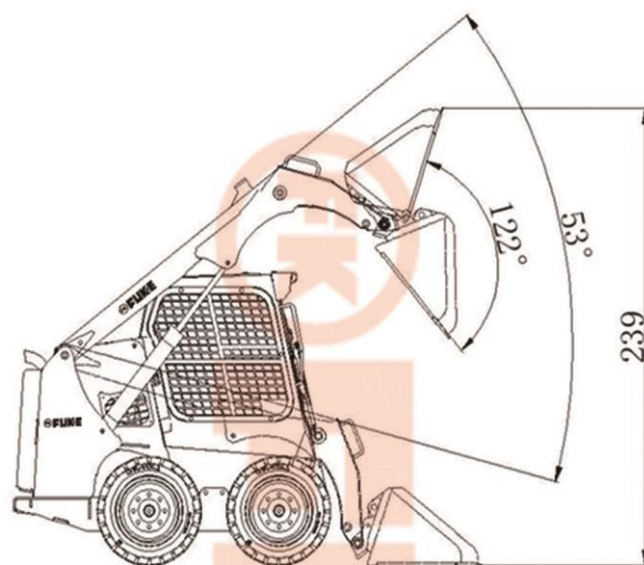

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE Skid Loader Attachments


4 in 1 bucket



Pallet fork



Dozer blade



Snow blade



Grapple bucket



Fork grapple



Backhoe



Backhoe arm



Sweeper



Angle Broom



Breaker



Planer



Trencher



Auger



Vibratory roller




Disk type trencher



Mixer



Snow Blower



*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:
Phone/Whatsapp: +8613505697380
Email: fk002@fukebn.com / fuke7380@gmail.com