



Basic Information

Bucket capacity

0.3m³

Rated power

40kw

Displacement

2.67L

Loading Capacity




700kg

Basic Parameters

Technical Specification

Outline

Engine model	490
Bore×stroke (mm)	95×105
Rated power (Kw)	40
Rpm	2650
Number of cylinders	4
Max.torque(N.m)	156
Displacement (L)	2.67
Max.Speed (km/h)	10
Tire (track) model	300×52.5
Loading Capacity(kg)	700
Lifting	Arc-Shaped Lifting
Bucket capacity(m ³)	0.3
Rated flow(L/min)	60
Tank capacity(L)	50
Weight with bucket(kg)	2800
Height at Max. Extension (mm)	3350
Hinge Pin Height (mm)	2770
Total Height (mm)	2050
Height to bottom of bucket(mm)	2603
Overall length without bucket(mm)	2300
overall length with bucket(mm)	2950
Dumping angle at maximum height(°)	40
Dumping height(mm)	2100
Dumping reach(mm)	790
Rollback at ground position(°)	30
Rollback fully raised at max height(°)	104
Wheelbase(mm)	1240

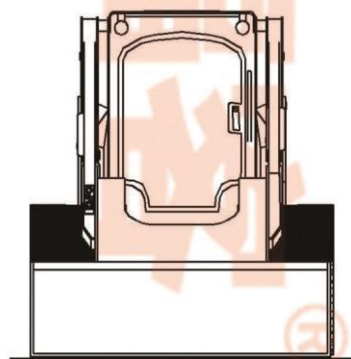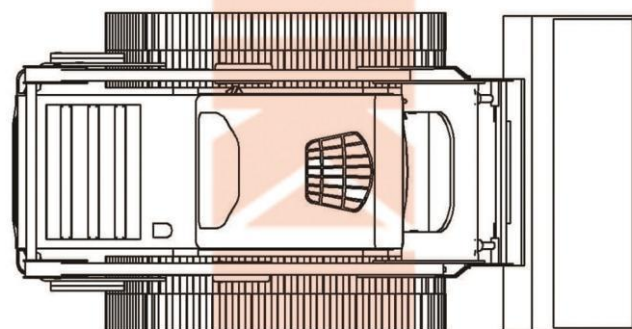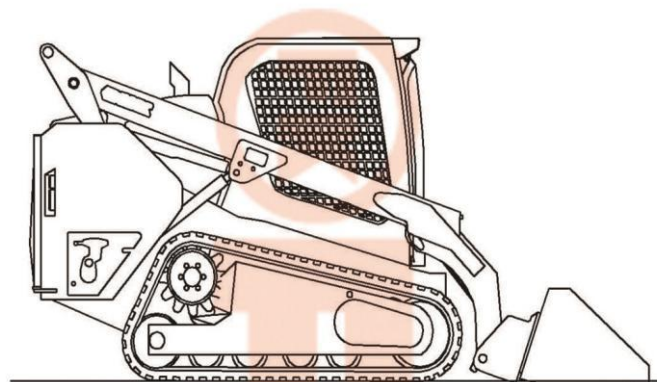

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com

FUKE Skid Loader Attachments


4 in 1 bucket



Pallet fork



Dozer blade



Snow blade



Grapple bucket



Fork grapple



Backhoe



Backhoe arm



Sweeper



Angle Broom



Breaker



Planer



Trencher



Auger



Vibratory roller



Disk type trencher



Mixer



Snow Blower



*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:
Phone/Whatsapp: +8613505697380
Email: fk002@fukebn.com / fuke7380@gmail.com