

FK-956G

进 取 不 止

www.fukeonline.com

fk002@fukebn.com

Basic Configuration

Bucket capacity

1-1.2m³

Operation weight

8200kg

Rated power

162KW

Tire size

17.5-25R

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Anhui FUKU Heavy Industries Ltd.

web:www.sfuke.com

Basic Parameters

Rated power:162KW

Overall Dimension (mm) (L × W × H):

8160X3050X2300

Bucket Capacity:1.5m³

Operation weight:8200KG

Tire size:17.5-25R

Excellent Performance

Outstanding Performance

The Equipment Is Firm

Reliable Quality

Brand Guarantee

Reliable structure

Excellent efficiency

Booster

Car air conditioner

Protective Device

GPS positioning

On-board repair tools

CD Player

Fire extinguisher

Comfortable operation



Safe performance

High efficiency

Strong bearing

Driving comfort

Loader Outline

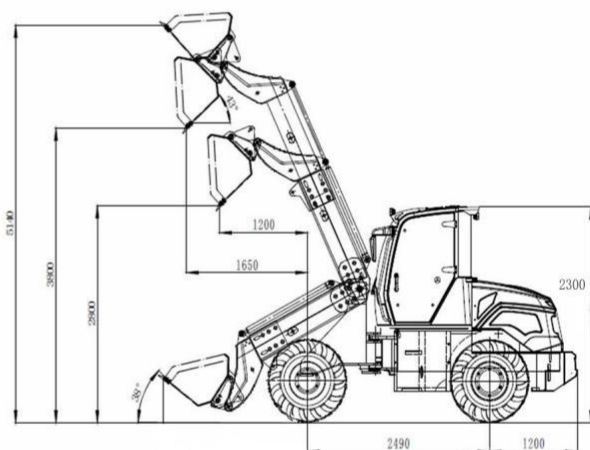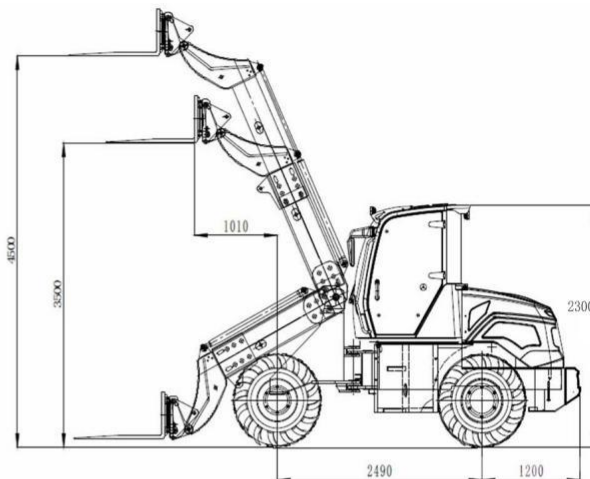

Structure Workshop

FUKE 福客®

结构车间



*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

web:www.sfuke.com

whatsapp:+8613505697380

Address: Room 405, Building B-4, East Side of Dazhong Road, Cuozhen

Town, FeidongCounty,Hefei City,Anhui Province

web:

www.sfuke.com

Type 1 Mechanical Operating System




Type 2 Pilot Operating System



Type 3 Advanced Operating Systems

(Pilot and Image Operating Systems)

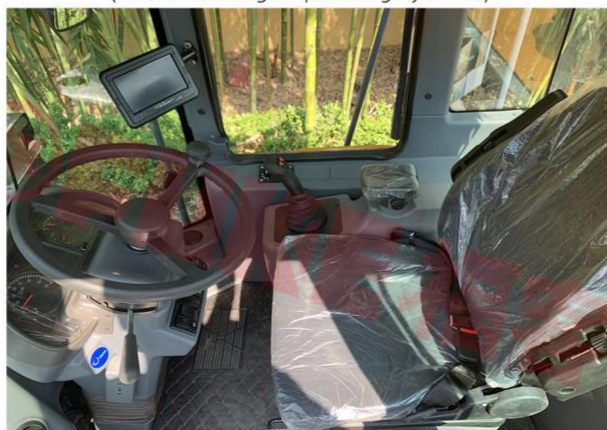

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Loader accessories ●



*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.