

FUKE 福客 **FK-50T**



Basic Information

Engine rated power

276kw

Front axle

16200kg


Max. total rated lifting capacity

50T

Rear axle

26000kg


Basic Parameters

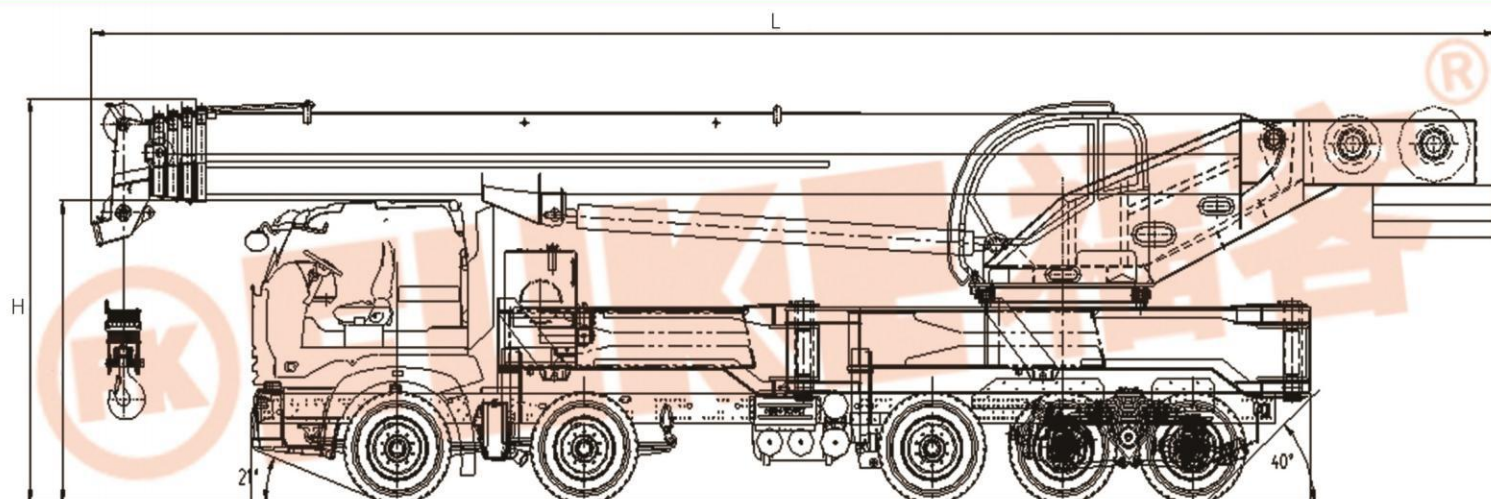

Technical Specification

Overall length	13930	mm
Overall width	2780	mm
Overall Height	3630	mm
Wheel Base	2304+2075	mm
Total vehicle mass in travel configuration	42200	kg
Front axle	16200	kg
Rear axle	26000	
Engine Model	Yuchai	
Engine rated power	276/2200	kw/(r/min)
Engine rated torque	1500/1300-1600	N.m/(r/min)
Max. travel speed	85	km/h
Min. steady travel speed	2~3	km/h
Min. turning diameter	24	m
Min. ground clearance	327	mm
Max. grade ability	42	%
Approach angle	19	°
Departure angle	15	°
Braking distance (at 30 km/h, full load)	≤10	m
Oil consumption per 100km	40	L
Exterior noise level during acceleration traveling	≤88	dB (A)
Noise level at seated position	≤90	dB (A)
Max. total rated lifting capacity	50	t
Min. rated working radius	3	m
Turning radius at turntable tail	3800	mm

Outline

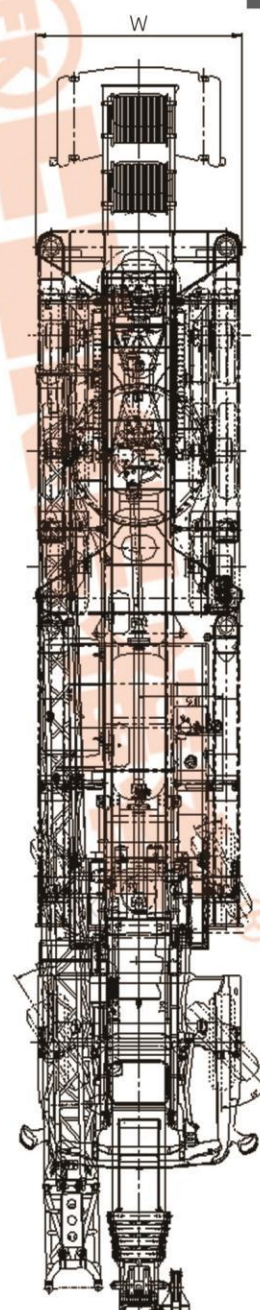

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

PUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:
Phone/Whatsapp: +8613505697380
Email: fk002@fukebn.com/fuke7380@gmail.com