



FUKE

FK CT-50T



FK CT-50T




Modle

Traveling speed
0-1.2km/h

Rated speed
21000rpm

Rated power
242kw

Gradeability
30%

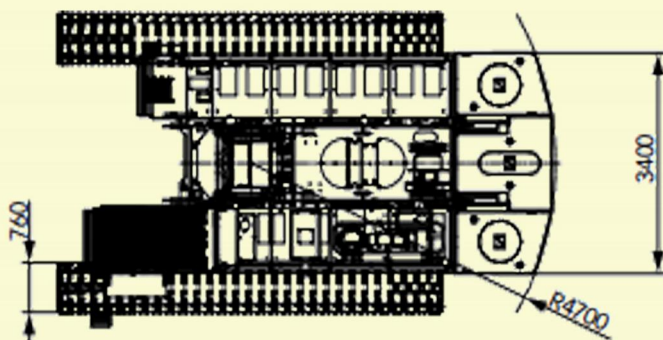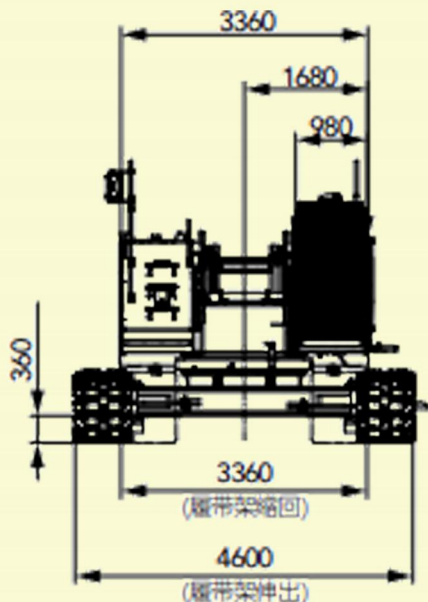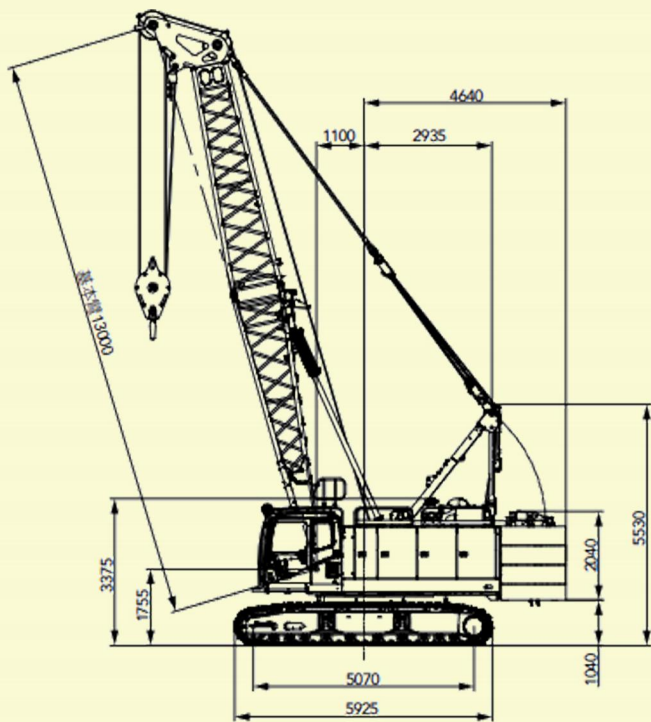

► Main arm condition


Tamping level:	350/800t-m
Allowable rammer weight:	17.5/24t
Main arm length:	19-25m
operating angle:	60-80°

► parameter of velocity

Main winch speed:	115m/min
Main amplitude winding speed:	80m/min
rotating speed:	2.0rpm
traveling speed:	0-1.2km/h

► Transport parameter

Basic arm weight of the machine:	57200kg
Rear counterweight weight:	19000kg
Transport weight of main engine:	35000kg
L * w * h:	12050 × 3360 × 3375mm

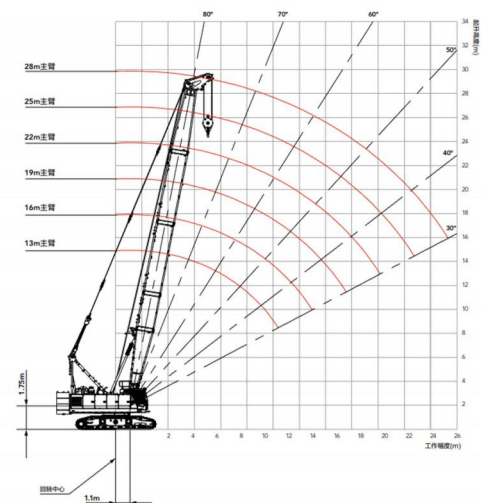

半径 / 臂长 (m)		后配重 19t																半径 / 臂长 (m)
		16				19				22				25				
仰角 (°)	前后 (t)	左右 (t)	高度 (m)	仰角 (°)	前后 (t)	左右 (t)	高度 (m)	仰角 (°)	前后 (t)	左右 (t)	高度 (m)	仰角 (°)	前后 (t)	左右 (t)	高度 (m)			
6	74.8	28.2	27.0	16.9	77.5	28.1	27.0	20.1	77.7	24.7	23.7	23.0				6		
6.5	72.9	24.8	23.9	16.7	76.0	24.8	23.8	19.9	76.3	22.0	21.2	22.9	78.0	21.9	21.1	26.0	6.5	
7	70.9	22.2	21.4	16.5	74.4	22.1	21.3	19.8	74.6	19.8	19.1	22.7	76.8	19.7	19.0	25.8	7	
7.5	69.0	20.0	19.3	16.3	72.8	19.9	19.2	19.6	75.0	19.8	19.1	22.7	76.8	19.7	19.0	25.8	7.5	
8	67.0	18.2	17.5	16.1	71.2	18.1	17.5	19.4	73.6	18.0	17.4	22.6	75.6	17.9	17.3	25.7	8	
8.5	65.0	16.6	16.1	15.8	69.6	16.6	16.0	19.2	72.2	16.5	15.9	22.4	74.4	16.4	15.8	25.5	8.5	
9	62.9	15.3	14.8	15.5	68.0	15.3	14.8	19.0	70.8	15.1	14.6	22.2	73.2	15.0	14.5	25.4	9	
9.5	60.8	14.2	13.7	15.2	66.4	14.1	13.7	18.7	69.4	14.0	13.5	22.0	72.0	13.9	13.4	25.2	9.5	
					64.7	13.1	12.7	18.5	68.0	13.0	12.6	21.7	70.8	12.9	12.5	25.0	10	
11					61.2	11.5	11.1	17.9	65.1	11.3	11.0	21.3	68.3	11.2	10.9	24.6	11	
12									62.1	10.0	9.7	20.7	65.8	9.9	9.6	24.1	12	
13													63.2	8.8	8.5	23.6	13	
14													60.5	7.9	7.6	23.0	14	

安徽福客重工有限公司
Anhui Fuke Heavy Industry Co., Ltd.

website: www.sfuke.com

whatsapp: +8613505697380

Address: Room 405, Building B-4, East Side of Dazhong Road, Cuozhen Town, Feidong County, Hefei City, Anhui Province